



Features

- Up to 7,500 display resolution
- Fast and accurate for any general weighing application
- ABS plastic housing with large stainless steel platter
- Easy-to-read LED display
- 5 weighing units: kg, lb, g, oz, lb:oz
- Simple two buttons for easy operation
- One-step successive Tare feature
- With wipedown plastic cover to protect the scale from dust and food particles

Specifications

Item	Parameters		
Capacity	3kgx0.0005kg / 6lbx0.001lb	6kgx0.001kg / 12lbx0.002lb	15kgx0.002kg / 30lbx0.005lb
Units of Measure	kg, lb, g, oz, lb : oz		
Function Keys	TARE/UNITS, ON/OFF/ZERO		
Display	7 digits 0.7" high LED display		
Power	12VDC 500mA center positive adapter or 6V 4Ah lead-acid rechargeable battery providing 20 hours of use between charges (both included)		
Operation Temp	-10°C to 40°C (14°F to 104°F)		
Scale Dimensions	305mm(L)x255mm(W)x110mm(H) / 12"(L)x10"(W)x4.25"(H)		
Weighing Pan	215mm(W)x245mm(L) / 8.5"(W)x9.5"(L)		
Packing	68x40x63cm/6pcs/ctn G.W.: 26kg N.W.: 24kg		
	20' container can hold 978pcs 40' container can hold 2028pcs		
Approvals	CE and WEEE directive, UL/CE/BS approved power adapter		



MEASURETEK
QUALITY SCALES

EHW-EM WEIGHING SCALE



- Bright red LED display, brightness is adjustable
- 2 keys for easy operation



- Tare a weight
- Switch between the unit of measure



- Zero the reading
- Power on or Power off the scale



- Adjustable feet allows to use on an uneven ground



- Can be operated on rechargeable battery, 6V/4Ah (Optional)




- Optional rear side LED display



- Leveling bubble helps to adjust scale to horizontal position easily

Dimensions

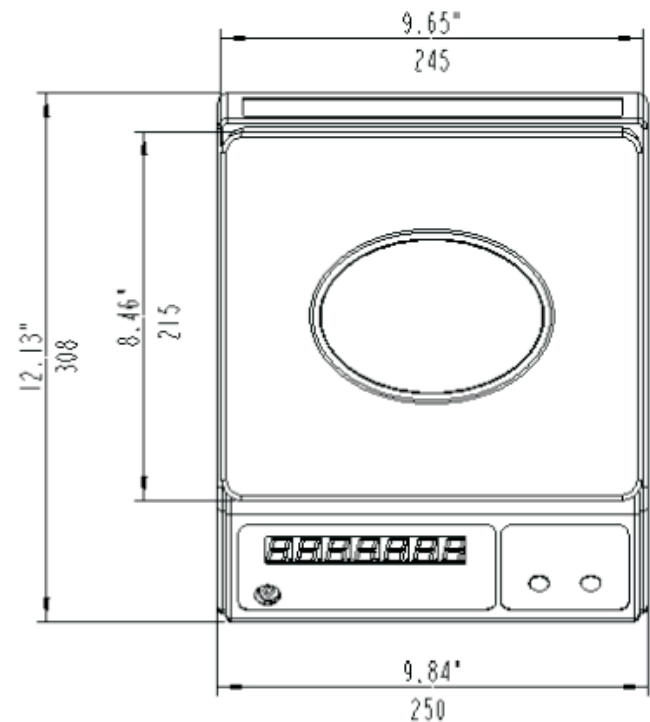

Email: info@easthigh.com.cn
 Http://www.easthighscale.com