




Features

- **Applications:** Warehouse, Shops, Stores, or other industrial and commercial weighing
- **Loadcell:** Single point Alum. load cell, resolution up to 1/200,000
- **Construction:** Rugged ABS plastic housing
Large stainless steel weighing platform
Leveling bubble and adjustable feet for quick set-up and stability
- **Indicator:** Easy-to-read large LCD display with backlight
3 buttons for easy operation: ON/TARE, FUNC, OFF/MODE
- **Functions:** **Weighing, Check weighing, Parts counting** function
Overload indication, Low battery indication, Auto-off function


Specifications

Item	Parameters				
Model	EHX-6	EHX-15	EHX-30	EHX-10H	EHX-20H
Capacity	6kgx0.2g 12lbx0.0005lb	15kgx0.5g 30lbx0.001lb	30kgx1g 60lbx0.002lb	10kgx0.1g 20lbx0.0002lb	20kgx0.1g 40lbx0.0002lb
Units of Measure	kg, lb				
Display	1-window 6 1/2 digits, 0.73" (18.5mm) high, 7 segments LCD display with backlight				
Power	12V 500mA adapter or 6V 4Ah lead-acid rechargeable battery				
Serial Port	RS232				
Operation Temp	-10°C to 40°C (14°F to 104°F)				
Platter	285mm(W)x241.3mm(L) / 12.2"(W)x9.5"(L)				
Packing	730x380x510cm/6pcs/ctn				
Shipping Weight	G.W.: 32.5kg N.W.: 30kg				
Approvals	CE and WEEE directive, UL/CE/BS approved power adapter				
Options	RS232 cable				

Dimensions (mm/inch)

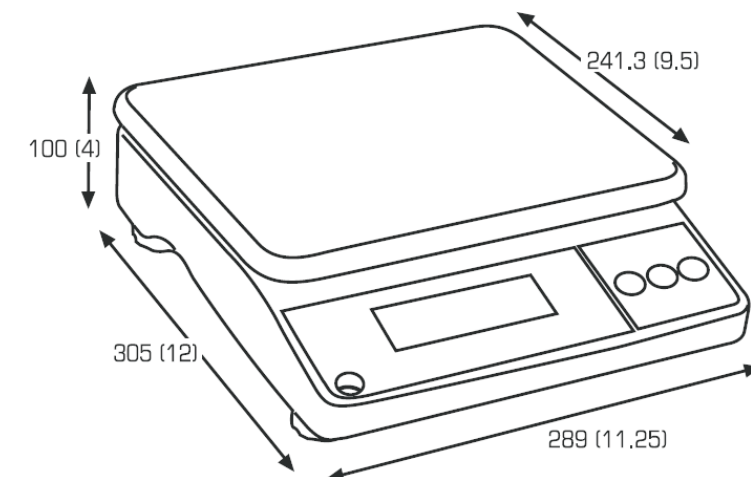

- Large backlit LCD display



- Removable SS platter for easy clean-up



- Bi-directional RS232 interface, allows to communicate with computer